

### MX-6224D

### DIGITAL MIXER AMPLIFIER 2X240W

The number of mosques around the world is rapidly increasing however there are very few sound systems that can match their complex needs, as well as their tight budget.

TOA has created the MX-6224d, an affordable digital mixer amplifi er, specifi cally to cater for medium and small mosques. the MX-6224d is a reliable and simple system, needing very little technical knowledge to operate, yet still maintains exceptional sound quality.



Order no: MX-6224D 1CE



# MX-6224D DIGITAL MIXER AMPLIFIER 2X240W


#### Specifications

Power source	220 - 240 V AC, 50 / 60 Hz
Rated output	240 W (2 ch (100 V, 42 Ω, rated output)
Frequency response	50 Hz - 20 kHz
Distortion	< 1 %
S/N ratio	60 dB
Connectable microphones	6
Inputs	MIC 1: -50 dBV (24 V phantom powered) / -60 dBV (phantom power off), 600 $\Omega$ , electronically balanced, 6.3 mm phone jack MIC 2 – 4: -66 dBV, 200 $\Omega$ , electronically balanced, 6.3 mm phone jack or XLR MIC 5 – 6: -60 dBV, 600 $\Omega$ , electronically-balanced, 6.3 mm phone jack or XLRAUX 1: -10 dBV, 10 k $\Omega$ mixed monaural, unbalanced, RCA pin jacks (1 pair) AUX 2: -20 dBV, 10 k $\Omega$ mixed monaural, stereo mini jack
Outputs	PWR AMP OUT ROOM (1.0 V (0 dBV), Unbalanced 10 k $\Omega$ , RCA mini jack) PWR AMP OUT OUTSIDE (1.0 V (0 dBV), Unbalanced 10 k $\Omega$ , RCA mini jack) REC OUT EFFECT BUS OUT PRE AMP OUT ROOM PRE AMP OUT OUTSIDE
Dimensions (W x H x D)	420 x 99,8 x 360,6 mm
Dimensions (ø x D)	x 360,6 mm
Finish	Aluminium, Steel plate, paint, black
Operating humidity	35% to 80%
Operating temperature	0°C to + 40°C




## MX-6224D DIGITAL MIXER AMPLIFIER 2X240W

Appearance

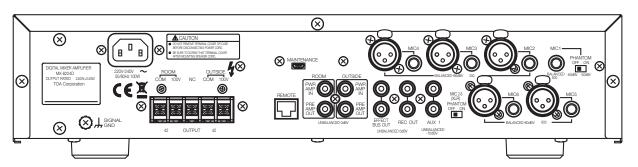

Rear View

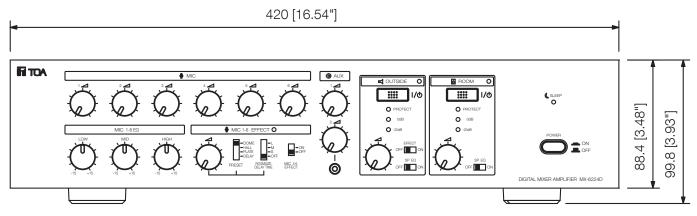

Front View